

Specification

Fiche

Label

Product Specification



Product Code: TCIMVH-0200SFC

Item Description: 200L CYCLONE IND HG SLIMLINE C

C



- Manufactured from high grade Duplex stainless steel
- Fitted with Branded Quality Components
- Works with Air Source Heatpumps




Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
200 L	CYCLONE	IndirectUnvented	Stainless	CYCLONE	HG INDIRECT

Product Specification

Actual capacity (Ltr)	188	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	43	Cylinder material	LDX 2101
Unit weight full (kg)	230	Outer casing	COATED MILD STEEL
No immersions	1	Coil material	316L STAINLESS STEEL
Immersion spec	3KW@230V	Foam thickness	50
Max mains water pressure (Bar)	10	Operating temp (C)	60
Operating pressure (Bar)	7	Safety valve temp (C)	95
Tested to standard	BS EN 12897:2016	Warranty terms (Year)	25Y
No heat exchangers	1	Heat loss	2.02
Coil 1 rating (kW)	39	Coil 1 surface area (m ²)	2.5
Coil 1 max prim pressure (Bar)	3.5	Coil 1 resistance (Bar)	.07

Dimensions

A - Height (mm)	1880
B - Diameter (mm)	475
C (mm)	191
D (mm)	1006
E (mm)	191
F (mm)	351
G (mm)	1601
I (mm)	206

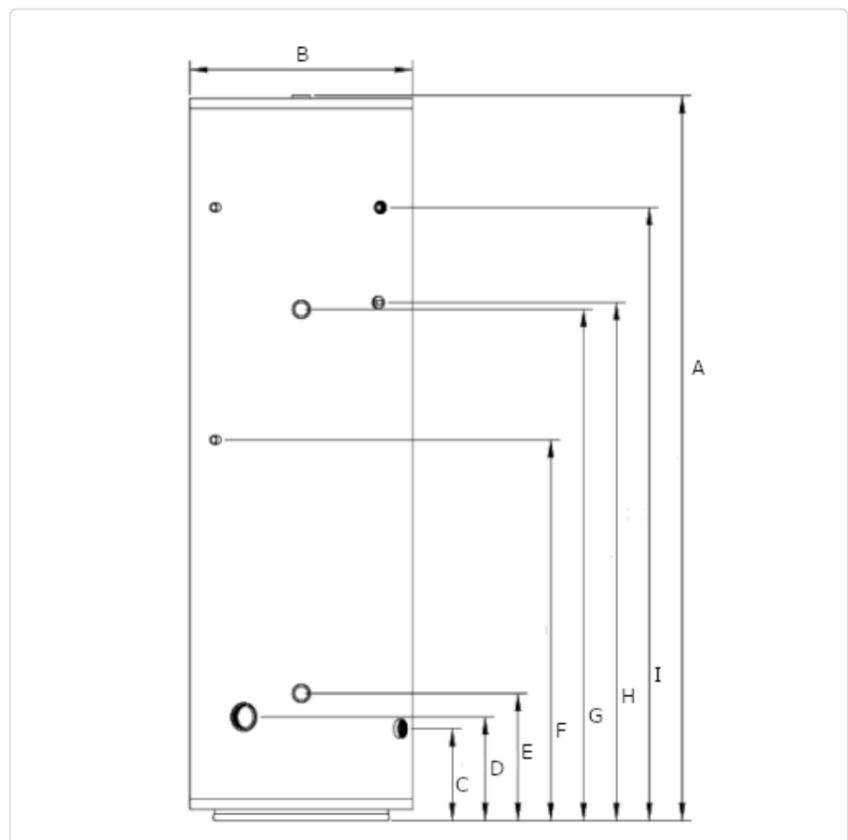

Click or scan here to view the product page:



<https://jouleuk.co.uk/products/cyclone-slim-high-gain-indirect/>

joule
Manufacturing Excellence

Test Standard: BS EN 12897:2016

Joule UK

4 Valencia Park, Gilcar Way,
Wakefield Europort
Castleford, West Yorkshire
WF105QS, UK

Joule Ireland

Unit 407 NW Business Park,
Cappagh Road, Ballycoolin,
Blanchardstown,
Dublin