



Product Code: TCIMVH-0250NFC

Item Description: 250L CYCLONE IND HG SHORT C

C

- Manufactured from high grade Duplex stainless steel
- Fitted with Branded Quality Components
- Works with Air Source Heatpumps



Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
250 L	CYCLONE	IndirectUnvented	Stainless	CYCLONE	HG INDIRECT


Product Specification

Actual capacity (Ltr)	247	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	66	Cylinder material	LDX 2101
Unit weight full (kg)	315	Outer casing	COATED MILD STEEL
No immersions	1	Coil material	316L STAINLESS STEEL
Immersion spec	3KW@230V	Foam thickness	50
Max mains water pressure (Bar)	10	Operating temp (C)	60
Operating pressure (Bar)	7	Safety valve temp (C)	90
Tested to standard	BS EN 12897:2016	Warranty terms (Year)	25Y
No heat exchangers	1	Heat loss	2.09
Coil 1 rating (kW)	42	Coil 1 surface area (m²)	2.8
Coil 1 max prim pressure (Bar)	3.5	Coil 1 resistance (Bar)	.09



Dimensions

A (mm)	1400
B (mm)	600
C (mm)	218
D (mm)	893
E (mm)	283
F (mm)	483
G (mm)	1133
I (mm)	233
J (mm)	1133

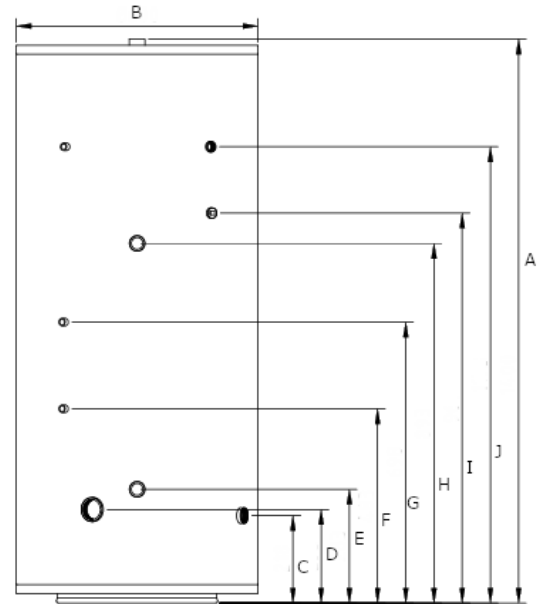

Talk to our sales and distribution partner today.

01271 850 204 • sales@energylabuk.com

energylabuk.com • [in @the-energy-lab-solutions](https://www.linkedin.com/company/the-energy-lab-solutions)

Supporting you at every install.

Registered Address: Millennium House, Brannam Crescent, Roundswell Business Park,
Barnstaple, Devon, EX31 3TD United Kingdom | Company Number: 08586990