

Product Specification

Product Code: TCIMVG-0250LFC

Item Description: 250L SOL TWIN HG STANDARD C

C



- Manufactured from high grade Duplex stainless steel
- Fitted with Branded Quality Components
- Heatpump (High Recovery) & Solar Ready




Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
250 L	CYCLONE	IndirectUnvented	Stainless	CYCLONE	HG SOLAR

Product Specification

Actual capacity (Ltr)	247	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	70	Cylinder material	LDX 2101
Unit weight full (kg)	318	Outer casing	COATED MILD STEEL
No immersions	1	Coil material	316L STAINLESS STEEL
Immersion spec	3KW@230V	Foam thickness	0
Max mains water pressure (Bar)	10	Operating temp (C)	60
Operating pressure (Bar)	7	Safety valve temp (C)	95
Tested to standard	BS EN 12897:2006	Warranty terms (Year)	1Y
No heat exchangers	2	Heat loss	2.14
Coil 1 rating (kW)	96.55	Coil 2 rating (kW)	22
Coil 1 surface area (m ²)	2.8	Coil 2 surface area (m ²)	.77
Coil 1 max prim pressure (Bar)	3.5	Coil 2 max prim pressure (Bar)	3.5
Coil 1 resistance (Bar)	.23	Coil 2 resistance (Bar)	.63

Dimensions

A - Height (mm)	1815
B - Diameter (mm)	540
C (mm)	196
D (mm)	211
E (mm)	261
F (mm)	1011
G (mm)	1271
I (mm)	1531

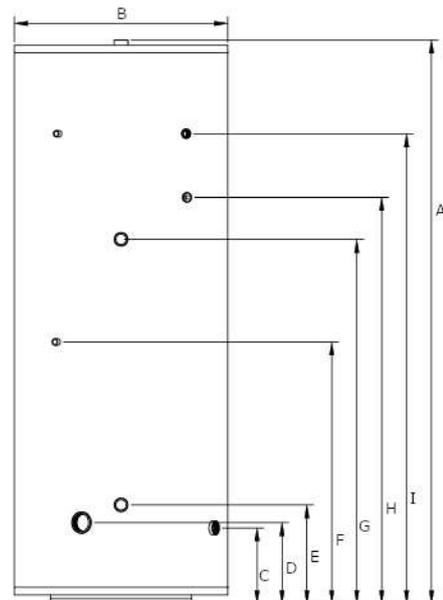

Talk to our sales and distribution partner today.

01271 850 204 • sales@energylabuk.com
energylabuk.com • @the-energy-lab-solutions

Supporting you at every install.

Registered Address: Millennium House, Brannam Crescent, Roundswell Business Park, Barnstaple, Devon, EX31 3TD United Kingdom | Company Number: 08586990

