

CAHV-R450YA-HPB

Ecodan Air Source Heat Pump

The Mitsubishi Electric Ecodan **CAHV air source heat pump** uses low GWP R454C refrigerant, offering a robust, low carbon system for the provision of sanitary hot water and space heating. This innovative heat pump solution can operate as a single system or form part of a multiple unit system, making it suitable for most commercial applications.

The multiple unit system has the ability to cascade available units to both on and off mode to meet the load from a building. As an example of this unique modulation, a 16 unit system allows 0.5kW increments of capacity, from 7.8kW all the way up to 640kW*. With cascade and rotation built in as standard, the Ecodan CAHV system is perfectly suited to commercial applications including schools and hospitals.



*At nominal conditions A7W35

Key Features & Benefits:

- Low GWP R454C refrigerant and reduced embodied carbon helps achieve CSR targets
- Achieves 70°C outlet temperature down to -20°C ambient temperature for continuous heating provision
- Multiple unit cascade control from 7.8kW to 640kW capacity provides design flexibility for a wide range of commercial applications
- Water flow temperatures from 24°C to 70°C without boost heaters results in cost and energy savings
- Advanced heat exchange design combined with the properties of R454C refrigerant enables a shorter defrost time
- Low frequency compressor control improves energy efficiency and product operation
- Ability to rotate units based on accumulated run hours offers extended product life
- Requires only water and electrical connections, for ease of installation
- Hermetically-sealed monobloc design, requiring low maintenance






MODEL		CAHV-R450YA-HPB	
Power source		3-phase 4-wire 380-400-415V 50/60 Hz	
Capacity(EN14511) ^{*1}		40	
	Power input	kW	14.03
	Current input	A	23.7-22.5-21.7
	COP (kW/kW)		2.85
	SCOP Low/Medium		3.57/3.24
Capacity ^{*2}		33.4	
	Power input	kW	16.6
	Current input	A	28.0-26.6-25.7
	COP (kW/kW)		2.01
Maximum current input		A	
Water pressure drop ^{*1}		10.2 kPa (1.47 psi)	
Temperature range ^{*5}	Outlet water temperature	24-70°C	
	Outdoor temperature	D.B. -25-43°C	
Circulating water volume range ^{*5}		25 l/min-250 l/min	
Sound pressure level (measured 1m below the unit in an anechoic room) ^{*1*4}		dB (A) 64	
Sound pressure level (measured 1m below the unit in an anechoic room) ^{*3*4}		dB (A) 72	
Water pipe diameter and type	Inlet	mm (in) 38.1 (1 1/2"), housing type joint	
	Outlet	mm (in) 38.1 (1 1/2"), housing type joint	
External finish		Acrylic painted steel sheet <Munsell 5Y 8/1 or similar>	
External dimensions H x W x D		mm 1710 x 1750 x 740	
Net weight		kg (lbs) 359 (791)	
Design pressure	R454C	MPa 3.85	
	Water	MPa 1.0	
Heat exchanger	Water-side	Copper brazed stainless steel sheet	
	Air-side	Plate fins and copper tubes	
Compressor	Type	Inverter scroll hermetic compressor	
	Manufacturer	MITSUBISHI ELECTRIC CORPORATION	
	Starting method	Inverter	
	Motor output	kW 12.1	
	Lubricant	FVC32EA	
Fan	Air flow rate	L/s 2500 x 2	
	External static pressure	10 Pa (1mm H2O)	
	Type and quantity	Propeller fan x 2	
	Control and driving mechanism	Inverter control, direct driven by motor	
	Motor output	kW 0.92 x 2	
HIC (Heat inter-changer) circuit		Copper pipe	
Protection devices	High pressure	High-pressure sensor and switch set at 3.85 MPa (643 psi)	
	Inverter circuit	Overheat and overcurrent protection	
	Compressor	Overheat protection	
	Fan motor	Thermal switch	
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle)	
Refrigerant	Type and factory charge	kg R454C, 9.0 kg	
	Flow and temperature control	LEV and HIC circuit	

Notes:

- *1 Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.
- *2 Under normal heating conditions at the outdoor temperature of -5°CDB/-6°CWB and the outlet water temperature of 55°C.
- *3 Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB when the unit is set to the "Capacity Priority" mode through the dry NC-contact.
- *4 The sound pressure level is a value measured in an anechoic room in accordance with the conventional method in JRA4060.
- *5

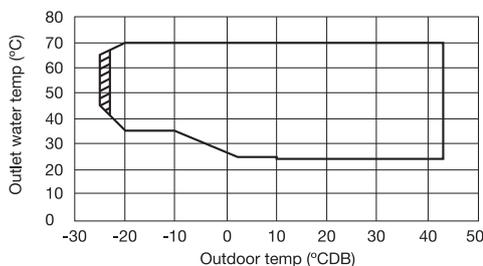

Outdoor temp. -25°CDB/Outlet water temp. 45-65°C
 Outdoor temp. -20°CDB/Outlet water temp. 35-70°C
 Outdoor temp. 43°CDB/Outlet water temp. 24-70°C


*6 4.0 - 15.0 m³/h under the following conditions:

- a. When the outdoor temperature is below 0°C,
- b. When the outlet water temperature is 30°C or below AND the outdoor temperature is 6°C or below.




CAHV-R450YA-HPB DIMENSIONS


SIDE VIEW

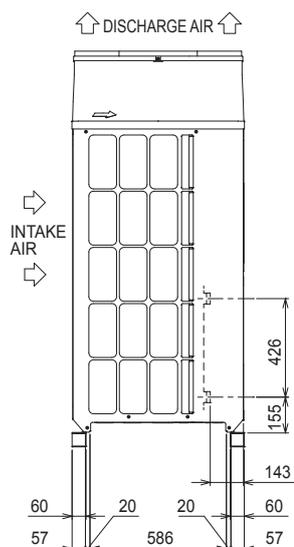

FRONT VIEW

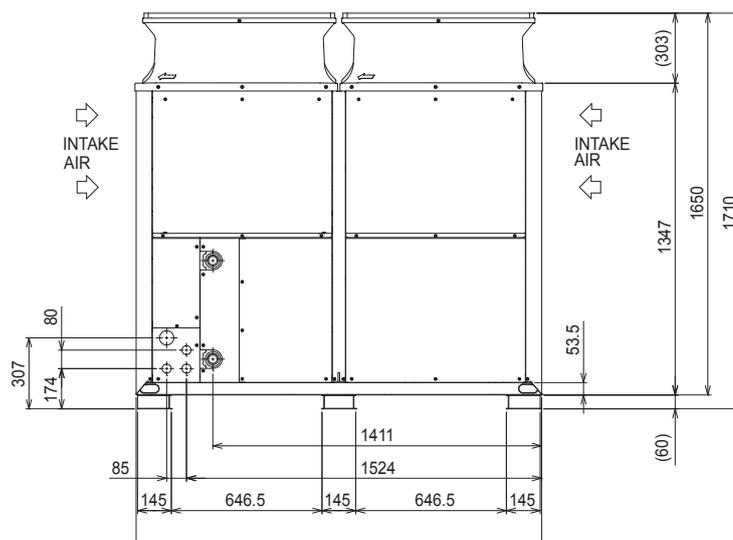

UPPER VIEW

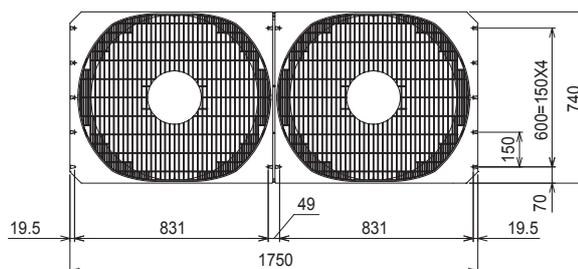

Talk to our sales and distribution partner today.

01271 850 204 • sales@energylabuk.com
energylabuk.com • [@the-energy-lab-solutions](https://www.linkedin.com/company/the-energy-lab-solutions)

Supporting you at every install.

Registered Address: Millennium House, Brannam Crescent, Roundswell Business Park, Barnstaple, Devon, EX31 3TD United Kingdom | Company Number: 08586990