

PUZ-HWM140VHA(-BS)

Ecodan R32

Monobloc Air Source Heat Pump

R32

Key Features:

- A+++ high efficiency system
- Compact design
- Maintains full heating capacity at low temperatures
- Zero carbon solution
- MELCloud enabled

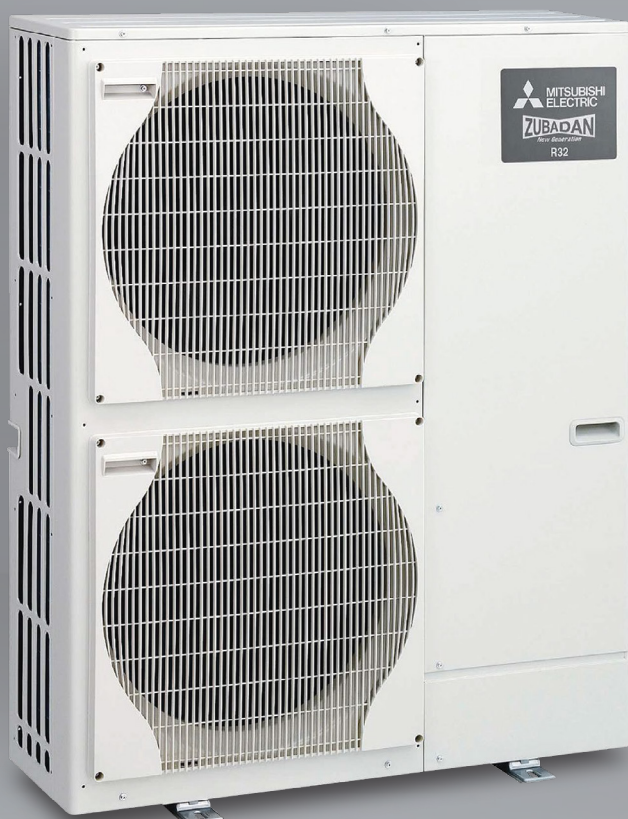
Key Benefits:

- Ultra low running cost
- Minimal installation space required
- Confident and quick product selection
- Help to tackle the climate crisis
- Remote control, monitoring, maintenance and technical support



3 years standard warranty included.

For information about extended warranties contact Energy Lab
Call: 01271 850 204 or Email: sales@energylabuk.com

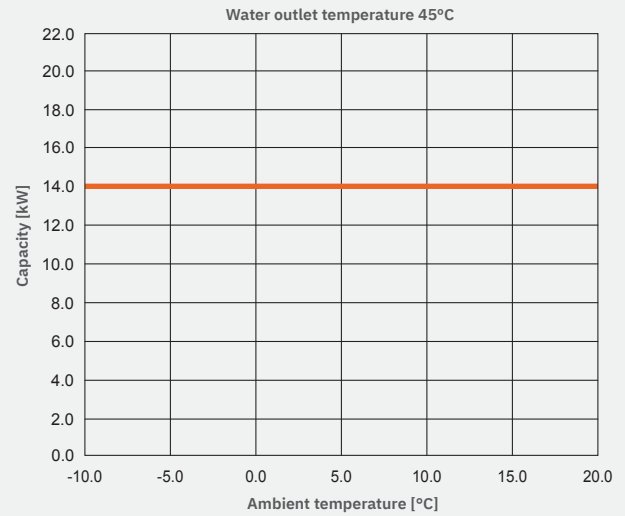
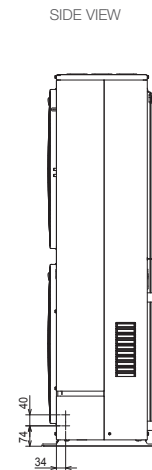
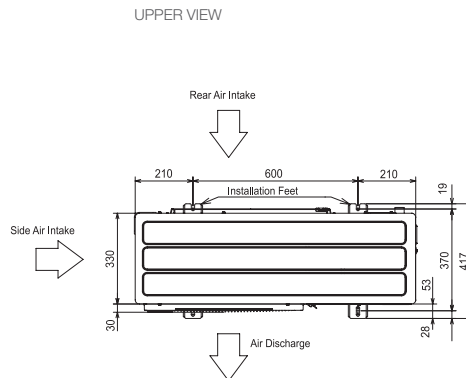
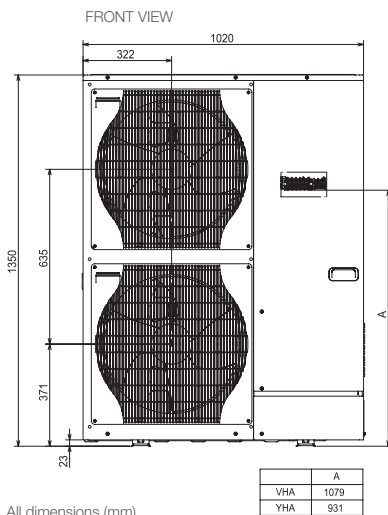


ecodan[®]
Renewable Heating Technology

OUTDOOR UNIT		PUZ-HWM140VHA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++
	η_s	131%
	SCOP (MCS)	3.35
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A+++
	η_s	176%
	SCOP (MCS)	4.48
HEAT PUMP COMBINATION HEATER - Large Profile ¹	ErP Rating	A+
	η_{wh}	130%
	Capacity (kW)	14
HEATING ² (A-7/W35)	Power Input (kW)	5.71
	COP	2.45
OPERATING AMBIENT TEMPERATURE (°C DB)		-28 ~ +35
SOUND DATA ³	Pressure Level at 1m (dBA)	53
	Power Level (dBA) ⁴	67
WATER DATA	Pipework Size (mm)	28
	Flow Rate (l/min)	40.1
	Water Pressure Drop (kPa)	20
DIMENSIONS (mm)	Width	1020
	Depth	330 + 30 ⁷
	Height	1350
WEIGHT (kg)		132
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz
	Phase	Single
	Nominal Running Current [MAX] (A) ⁵	13.8 [35]
	Fuse Rating - MCB Sizes (A) ⁶	40
REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t)		R32 (GWP 675) 3.3

Notes:¹ Combination with E*PT20X Cylinder² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

Low Noise mode accessory (reference PAC-SA89TA-EP) available for VHA chassis.

⁴ Sound power level tested to BS EN12102.⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.⁷ Grille. η_s is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency**NOMINAL HEATING CAPACITY****MCS Certification Number: 037-0035-20-02****PUZ-HWM140VHA(-BS) DIMENSIONS****Talk to our sales and distribution partner today.**

01271 850 204 • sales@energylabuk.com

energylabuk.com • @the-energy-lab-solutions

Supporting you at every install.

Registered Address: Millennium House, Brannam Crescent, Roundswell Business Park, Barnstaple, Devon, EX31 3TD United Kingdom | Company Number: 08586990