

# i-290 0121 Heat Pump

## R290 Gas

i-290

### Key Features

- ▶ Inverter Monoblock.
- ▶ Single solution for heating, cooling and hot water production.
- ▶ Unique design integrates advanced technical solutions and modern aesthetics.
- ▶ Maxa's i-290 heat pumps are designed to generate high water temperature even in the harshest conditions.
- ▶ Made in Italy.
- ▶ The i-290 range is available in 9 sizes, with power between 6 kW and the 27 kW.
- ▶ Market leading SCOP's.
- ▶ 3 year Manufacturer's warranty. For information about extended warranties contact Energy Lab.



Cooling			
Cooling capacity (1)	kW		17,4
Power input (1)	kW		5,26
E.E.R. (1)	W/W		3,31
Cooling capacity (2)	kW		19,6
Power input (2)	kW		4,02
E.E.R. (2)	W/W		4,88
SEER (5)	W/W		5,27
Water flow rate (1)	L/s		0,83
Useful head (1)	kPa		128
Heating			
Heating capacity (3)	kW		21,0
Power input (3)	kW		4,31
C.O.P. (3)	W/W		4,87
Heating capacity (4)	kW		19,6
Power input (4)	kW		6,13
C.O.P. (4)	W/W		3,20
Heating capacity (11)	kW		19,7
Power input (11)	kW		7,38
C.O.P. (11)	W/W		2,67
SCOP (6)	W/W		4,75
Water flow rate (3)	L/s		0,59
Useful head (3)	kPa		150
Energy efficiency (Water 35°C-65°C)			A+++ / A++

## Compressor

Type		Scroll DC Inverter
Compressors	n°	1
Refrigerant circuits	n°	1
Refrigerant quantity (7)	kg	1,7

## Hydraulic circuit

Plumbing fittings	inch	1" 1/4 M
Minimum water volume (8)	L	175

## Noise level

Sound power (9)	dB(A)	64
Sound pressure at 1m distance (10)	dB(A)	48

## Electrical data

Power supply		400V/3P+N+T/50Hz
Maximum power input	kW	11
Maximum input current	A	19

## Weight


Shipping weight	kg	276
-----------------	----	-----

MCS Certification Number: ICIM-PDC-000211

## SCOP-UK

Flow Temperature	SCOP
35°C	4.72
50°C	3.84
65°C	3.15

## i-290 0121 - Dimensions

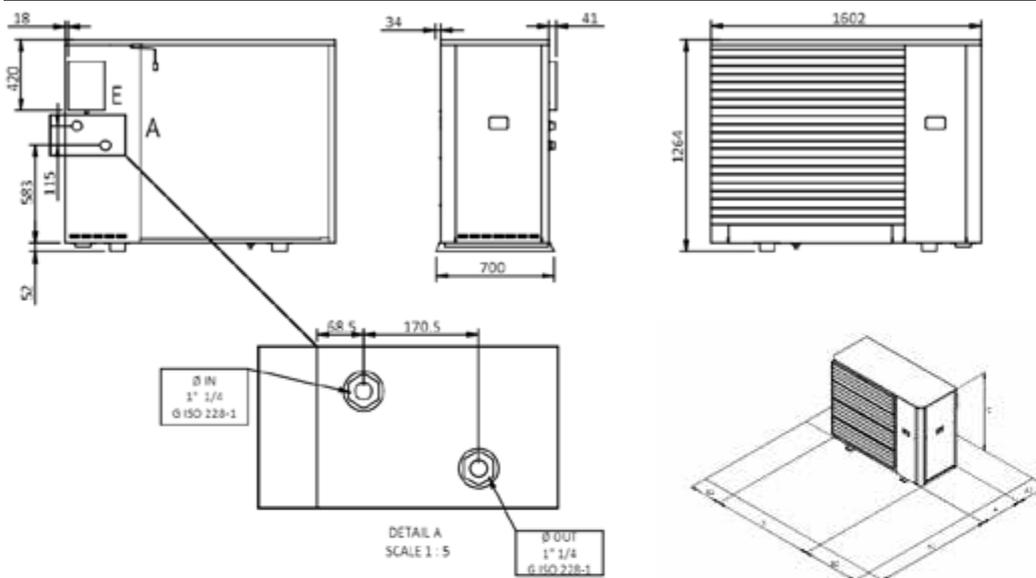

## • PERFORMANCE REFERRING TO THE FOLLOWING CONDITIONS:

- Cooling: outdoor air temperature 35°C; in/out water temperature 12/7°C.
- Cooling: outdoor air temperature 35°C; in/out water temperature 23/18°C.
- Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 30/35°C.
- Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 47/55°C.
- Cooling: low temperature, variable output, fixed flow rate.
- Heating: average climatic conditions; T<sub>biv</sub> = -7°C; low temperature, variable output, fixed flow rate.
- Indicative data subject to changes. For the correct value, always refer to the technical label on the unit.
- Calculated for a decrease in system water temperature of 10°C with a defrost cycle lasting 6 minutes.
- Sound power: heating mode according to EN 12102:2022; value determined on the basis of measurements made in accordance with UNI EN ISO 9614-1, in compliance with Eurovent certification requirements.
- Sound pressure: value calculated from the sound power level using the standard ISO 3744:2010 at a distance of 1 m.
- Heating: outdoor air temperature 7°C db 6°C db; in/out water temperature 55/65°C.